


PVC PROFILI ZA PROZORE I VRATA



Pouzdan partner za zajednički uspeh



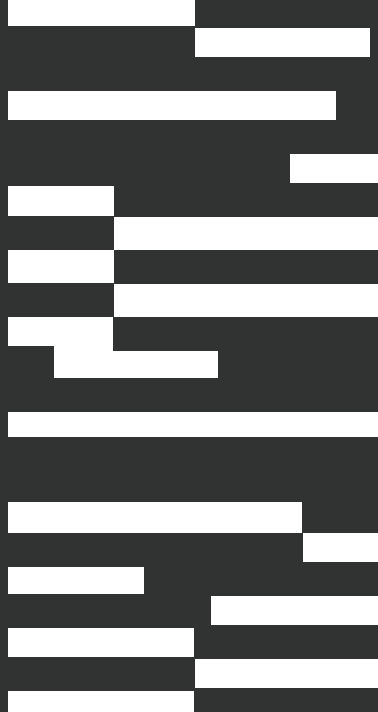



• Sistem profila od 70 mm sa 6 komora

• Mogućnost upotrebe trostruko zastakljenih jedinica do 48 mm debljine stakla što osigurava odlične zvučne i toplotne karakteristike.

• Ekološki prihvatljivi profili zbog upotrebe stabilizatora na bazi Ca-Zn

• Zaobljeni oblici sa mogućnošću upotrebe masivnih krila koji prozorima daju moderan stil

• Široka komora za ojačanje omogućava dobru stabilnost

• Preklapanje okvira i krila od 8 mm osigurava pravilno zaptivanje,

• Osovinsko rastojanje od 13 mm za okov pruža optimalnu zaštitu od provala,

• Koeficijent toplotne provodljivosti za prozor je 0.95 W/m² K (za staklo Ug = 0.7 W/m²K)(Referentna dimenzija prozora 1230 mmx1480 mm)

• Širok spektar laminiranih profila odgovara prozorima različitih arhitektonskih stilova.


Uw=0,95 W/m²K



1-Quartz Gray;
2-Norman Oak;
3-Frost Gray;
4-Gray Concrete;
5-Cream White;
6-Stripe Pine

7-Charcoal brown;
8-Walnut;
9-Solar Oak;
10-Dark Oak;
11-Pale Gray;
12-Black Brown;


13-Coal Gray;
14-African Cherry;
15-Cristal White;
16-Smoked Oak;
17-Mahogany;
18-Southern Oak

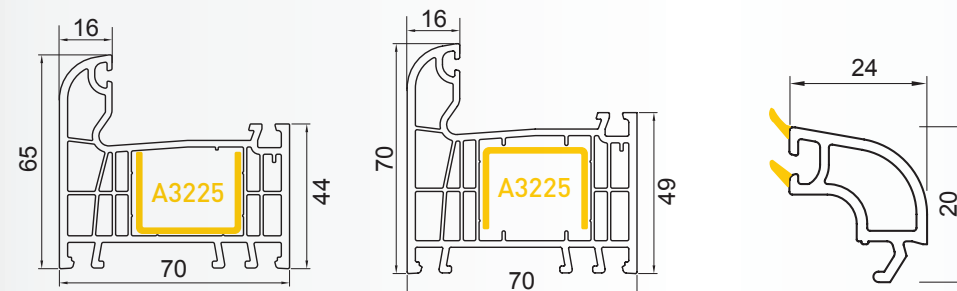

67010

67011


57040

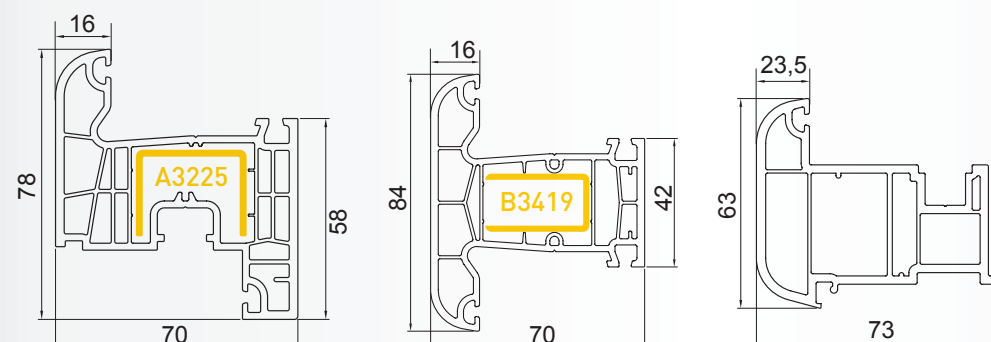

67020




57030

57031

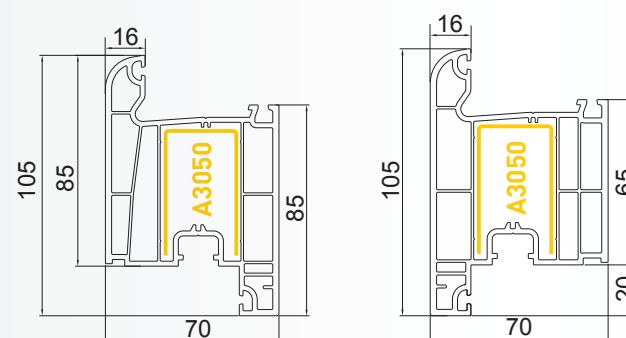

47022




47023



47050

47051

47059



57080


57083

57084


57085

70MM


TEHNIČKI CRTEŽI




57052




57055




57061



57062




57063



57069



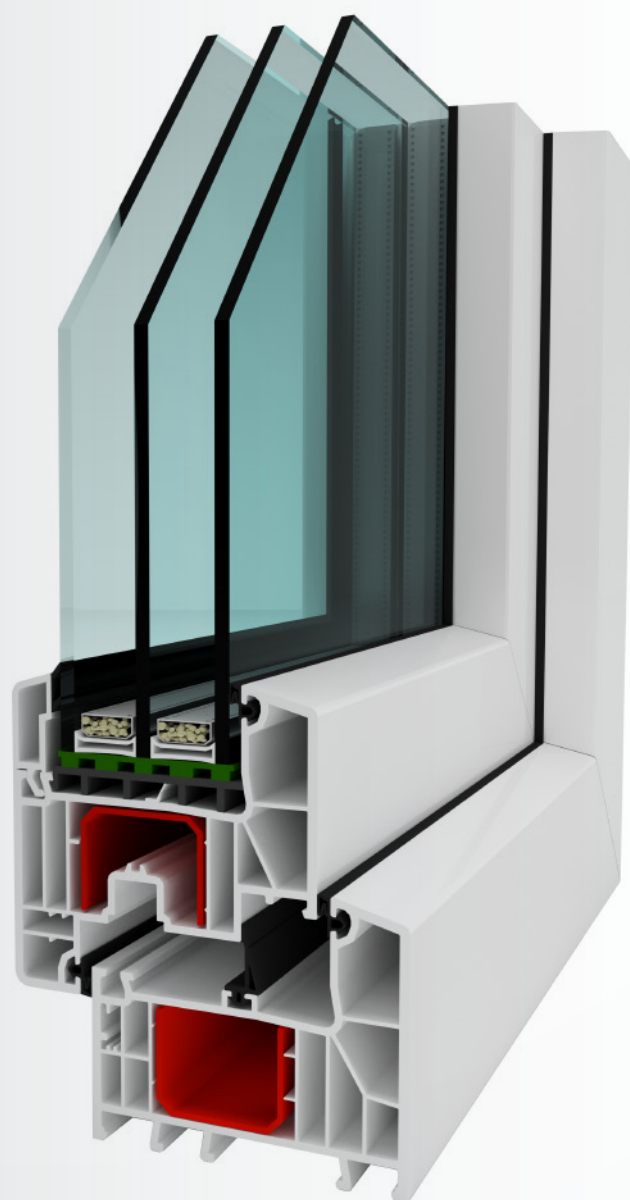


- Sistem profila od 86 mm sa 6 komora
- Velike komore omogućavaju pravilnu ventilaciju profila i usmeravanje kišnice
- Moguće zastakljivanje širine do 48 mm
- Dodatno interno zaptivanje poboljšava akustičke i termičke karakteristike prozora
- Dodatna zaptivka u komori za zastakljivanje dovodi do poboljšanja termičkih svojstava konstrukcije
- Dodatni elementi koji ojačavaju šarke
- Mogućnost dubokog postavljanja stakla poboljšava linijski parametar što kao krajnji rezultat dovodi do poboljšanja parametara toplotne propustljivosti prozora kao celine.
- Bez negativnih uticaja na životnu sredinu zbog primene stabilizatora na bazi Ca-Zn


$U_w=0,74 \text{ W/m}^2\text{K}$




- | | | |
|------------------|-------------------|--------------------|
| 1-Quartz Gray; | 7-Charcoal brown; | 13-Coal Gray; |
| 2-Norman Oak; | 8-Walnut; | 14-African Cherry; |
| 3-Frost Gray; | 9-Solar Oak; | 15-Cristal White; |
| 4-Gray Concrete; | 10-Dark Oak; | 16-Smoked Oak; |
| 5-Cream White; | 11-Pale Gray; | 17-Mahogany; |
| 6-Stripe Pine | 12-Black Brown; | 18-Southern Oak |




68611

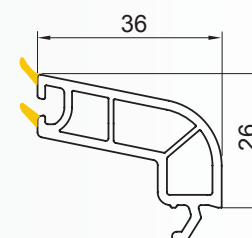


68641




68644




68621




68632




68633



68654



68683



68684K





EKOLUKA-KEY D.O.O.

Kneza Mihaila 278, 34000 Kragujevac, Srbija

+381 34 310 141, +381 34 310 129

info@ekoluka.rs

www.ekoluka.rs